

**THESIS**



**ANTITHESIS**



**SYNTHESIS**



**D8-D10 -D12**

**EF EUROFRIGO**

# Product specification

# D8 - D10 - D12

- Diesel Drive High Capacity range designed to deliver maximum performance in High Temperature environment above 50°C.  
Fitted with Yanmar Diesel engines, Bock Compressors and a User Friendly yet very complete Microstat Plus HMI, this new range have been designed with simplicity and reliability in mind.  
Every single aspect of the end users' needs and suggestions set the pace of its R&D process.
- Using R404a refrigerant SYNTHESIS delivers performance you can rely on, unmatched temperature pull-down and recovery thanks to its high performance electric fan motors .
- Accesibility for quicker service and maintenance operations thanks to the one-side service door and easy access electric box.




Units in mm, Data between ( ) relates to model D12



Microstat Plus HMI is a user friendly controller designed to grant a superior temperature management while keeping all system's components under control. Practical built in service hourmeters helps to keep unit's maintenance up-to-date.

		WATT		m	m3/h	VOLT					MT	Kg
<b>D8</b>	<b>FK30</b>	<b>7150</b>	<b>3350</b>	<b>6.0</b>	<b>2350</b>	-	<b>S</b>	<b>R404A</b>	<b>S</b>	<b>S</b>	<b>O</b>	<b>432</b>
<b>D10</b>	<b>FK40</b>	<b>8250</b>	<b>5185</b>	<b>9</b>	<b>2580</b>	-	<b>S</b>	<b>R404A</b>	<b>S</b>	<b>S</b>	<b>O</b>	<b>475</b>
<b>D12</b>	<b>FK40</b>	<b>11210</b>	<b>6785</b>	<b>12</b>	<b>3420</b>	-	<b>S</b>	<b>R404A</b>	<b>S</b>	<b>S</b>	<b>-</b>	<b>634</b>

(\*) Application at +30°C Ambient assuming 75mm insulation for chill and 100mm insulation for freeze application, 1 door opening per hour. Unit's selection may vary. Consult Your Eurofrigo Representative for detailed analysis of actual requirements.

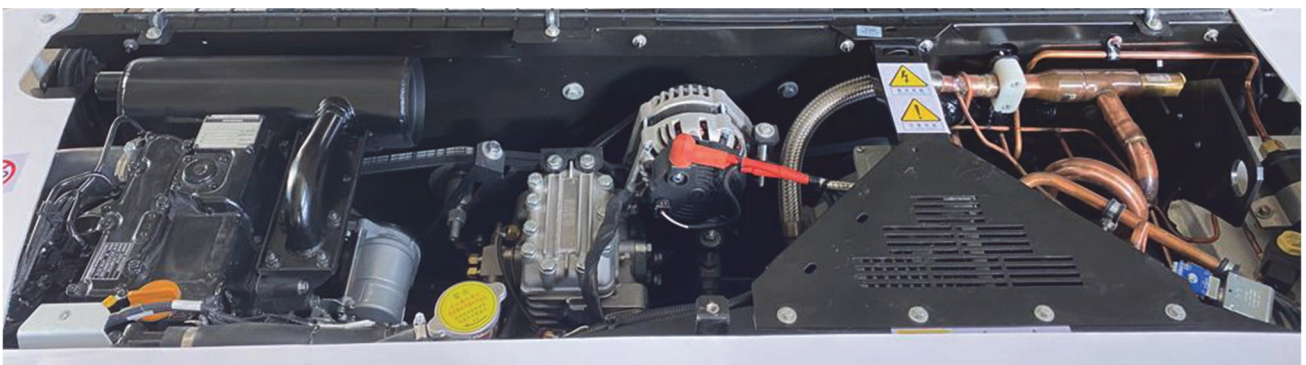

Your Local Representative



COLDQUEEN LDA  
Rua de São João - A dos Ralhados  
P2710-006 Sintra

There's no better way to cool